

Type 5509 Differential Pressure Gauge



- $\pm 2.5\%$ full scale accuracy
- Stainless steel case
- 316 stainless steel wetted parts
- Inches of water differential ranges
- Static pressure for ranges 160IW & lower – 145 psi above 160IW – 360 psi
- External zero adjust
- Available with open or solid front case styles
- Optional liquid-filled case
- 4" (100mm) or 6" (160mm) dial sizes

The Ashcroft® Type 5509 differential pressure gauge comes standard with 316SS wetted parts. This rugged gauge features an external zero adjust feature standard. Static pressure up to 360 psi.

PRODUCT SPECIFICATIONS

Model Number: 5509
Accuracy: $\pm 2.5\%$ full scale
Ranges: 0-10 IWD (inches of water differential) to 400 psid
Static Pressure: From 10 IWD to 3 psi – static pressure 145 psi 5 psi and above – static pressure 360 psi
Dial Size: 4" (100mm) or 6" (160mm) Zero adjust at top of case
Case Material: 304 stainless steel open front case (solid front optional)
Ring: Bayonet ring
Window: Shatterproof glass
Dial: Aluminum, white background, black figures and intervals.
Pointer: Black painted aluminum with external adjust feature standard (to 25% of range)

Ingress Protection: IP54 (dry) IP65 (liquid filled) IP65 optional (dry case XLJ)
Diaphragm Material: 316 stainless steel for ranges 15 psi and above. High strength cobalt alloy (Duratherm 600) for ranges below 15 psi
Housing Material: 316 stainless steel with a Viton® O-ring
Mounting: Stem, wall or pipe
Connection Size: ¼, ½ NPT
Connection Location: Lower

OPTIONAL FEATURES

Glycerin fill - Standard (L)
 Silicone fill - Optional (XGV)
 Weatherproof/Hermetically sealed case (IP65) (XLJ)
 Wall mounting bracket (XFW)
 Pipe mounting bracket (XTM)
 3-way manifold⁽¹⁾ (X43)
 Polycarbonate window (XPD)
 Solid front (S)

⁽¹⁾ Requires additional piping (not supplied).
 Viton® is a registered trademark of DuPont Co.

STANDARD RANGE TABLE*

psid	mBar	bar	I.W.D.
3	25	0.6	10
5	40	1.0	30
10	60	1.6	60
15	100	2.5	100
30	160	4	200
60	250	6	
100	400	10	
160		16	
200		25	
300			
400			

*Other ranges on application


HOW TO ORDER (Typical example)

10 5509 S L S 02L XXX 0/100 psid


Dial Size: 100mm (10), 160mm (16) _____
 Case Type: 5509 _____
 Diaphragm, Housing, Socket: (S) 316L SS _____
 Liquid Filled: (L) leave blank if dry _____
 Solid Front: (S) otherwise leave blank _____
 Connection Size, Location: ¼ (02), ½ (04), Lower (L) _____
 Options: _____
 Range: 0/100 psid _____

Type 5509 Differential Pressure Gauge

Dimensions - Open Front Case

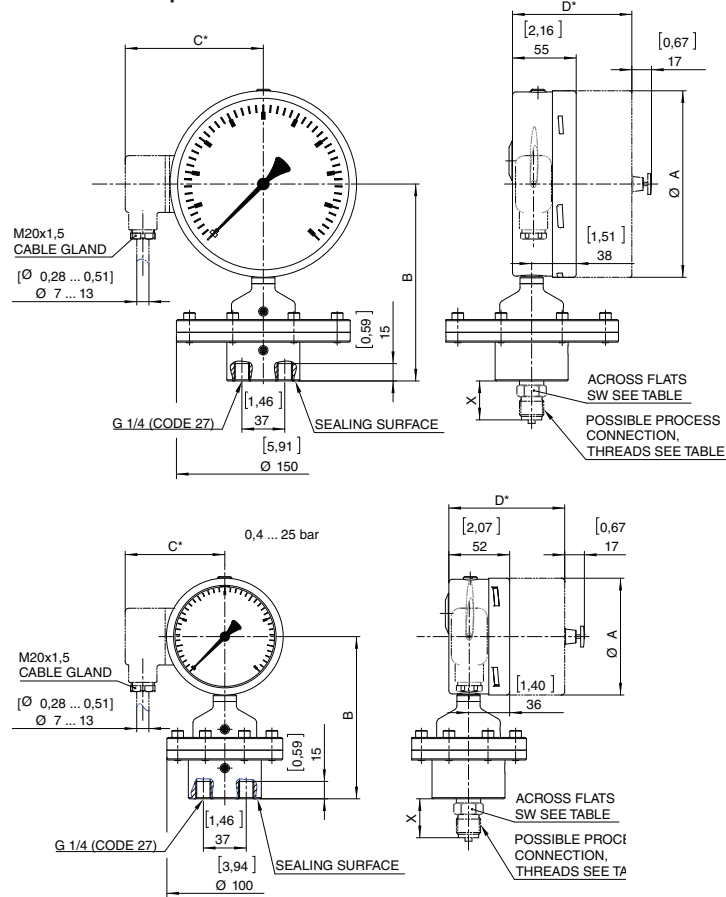

Dimensions - Solid Front Case



THREADS	CODE	X	SW
1/4 -18 NPT Male; DIN EN 837	02	30 [1,18]	19 [0,75]
1/2 -14 NPT Male; DIN EN 837	04	37 [1,46]	22 [0,87]
G1/4B Male; DIN EN 837	13	25 [0,98]	19 [0,75]
G1/2B Male; DIN EN 837	15	34 [1,34]	22 [0,87]
1/4 -18 NPT Female	25	20 [0,79]	19 [0,75]
1/4 -18 NPT Female	50	26 [1,02]	27 [1,06]
G1/2B Female; DIN EN 837	51	26 [1,02]	27 [1,06]

DIAL SIZE	A	B	C*	D*	D1*
100	101[3,98]	140[5,51]	86[3,39]	100[3,94]	116[4,57]
160	161[6,34]	170[6,69]	120[4,72]	102[4,02]	118[4,65]

*With integrated contacts