

Malleable Iron

Class 150 (Standard)

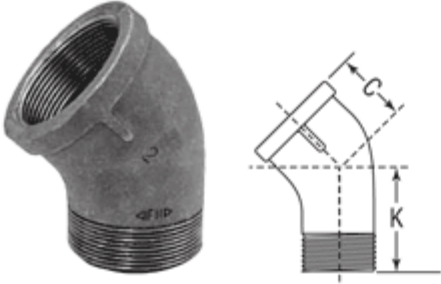
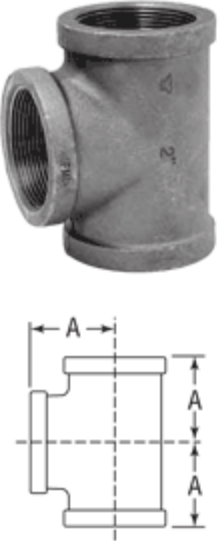
FIGURE 1104 45° Street Elbow	Size		C		K		Unit Weight			
							Black		Galv.	
	NPS	DN	in	mm	in	mm	lbs	kg	lbs	kg
	1/8	6	11/16	17	7/8	22	0.06	0.03	0.06	0.03
	1/4	8	3/4	19	15/16	24	0.10	0.05	0.10	0.05
	3/8	10	13/16	22	1	25	0.14	0.06	0.14	0.06
	1/2	15	7/8	22	1 1/8	29	0.20	0.09	0.20	0.09
	3/4	20	1	25	1 5/16	33	0.33	0.15	0.33	0.15
	1	25	1 1/8	29	1 7/16	37	0.52	0.24	0.52	0.24
	1 1/4	32	1 5/16	33	1 11/16	43	0.85	0.39	0.85	0.39
	1 1/2	40	1 7/16	37	1 7/8	48	1.22	0.55	1.22	0.55
	2	50	1 11/16	43	2 1/4	57	1.92	0.87	1.92	0.87

FIGURE 1105 Straight Tee	Size		A		Unit Weight			
					Black		Galv.	
	NPS	DN	in	mm	lbs	kg	lbs	kg
	1/8	6	11/16	17	0.09	0.04	0.09	0.04
	1/4	8	13/16	22	0.15	0.07	0.15	0.07
	3/8	10	15/16	24	0.23	0.10	0.23	0.10
	1/2	15	1 1/8	29	0.41	0.19	0.41	0.19
	3/4	20	1 5/16	33	0.60	0.27	0.60	0.27
	1	25	1 1/2	38	0.90	0.41	0.90	0.41
	1 1/4	32	1 3/4	44	1.31	0.59	1.31	0.59
	1 1/2	40	1 15/16	49	1.73	0.78	1.73	0.78
	2	50	2 1/4	57	2.52	1.14	2.52	1.14
	2 1/2	65	2 11/16	68	4.90	2.22	4.90	2.22
	3	80	3 1/16	78	7.13	3.23	7.13	3.23
	3 1/2	90	3 7/16	87	9.00	4.08	9.00	4.08
	4	100	3 13/16	98	11.32	5.13	11.32	5.13
	5	125	4 1/2	114	19.42	8.81	19.42	8.81
6	150	5 1/8	130	25.50	11.56	25.50	11.56	

Note: See page 17 for pressure-temperature ratings. Galvanized weights may vary. Please contact your Anvil Representative if you need verification.
 All Elbows & Tees 3/4" (10 DN) and Larger are 100% Gas Tested at a Minimum of 100 PSI. (6.9 bar)