

Seamless Pipe Nipples

Black & Galvanized, Std. Sch. 40, XH Sch. 80, Sch. 160, XXH



FIG. 320: Standard Black Sch. 40
FIG. 325: Extra Heavy Black Sch. 80
FIG. 326: 160 Black Sch. 160
FIG. 327: XXH Black
FIG. 330: Standard Galv. Sch. 40
FIG. 335: Extra Heavy Galv. Sch. 80
FIG. 333: 160 Galv. Sch. 160
FIG. 329: XXH Galvanized

Material


ASTM A106 Grade B Seamless Pipe
 ASTM A333 Grade 6 Seamless Pipe (For Canada only)

Note: Galvanized nipples from Longview Texas plant are electroplated. Galvanized nipples from Beck plant are hot dipped.

Applicable Specification

ASTM A733
 (Refer to the chart below for specific pipe dimensions.)

Note: Minimum wall thickness at any point to be not more than 10% over and 3 1/2% under nominal wall thickness specified for that size pipe.

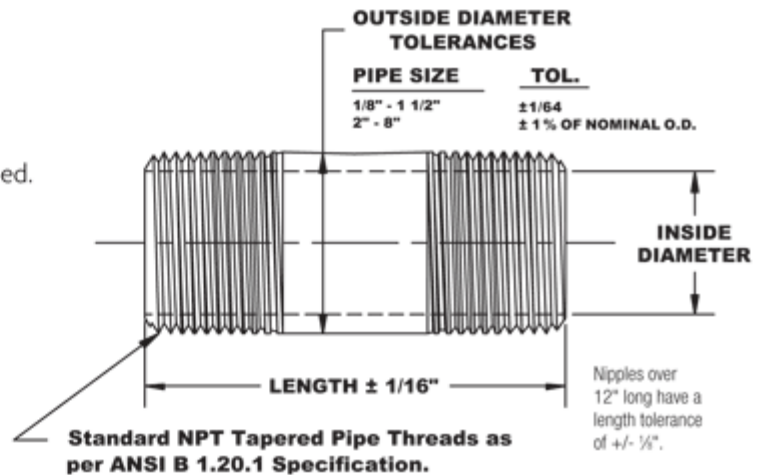

Pipe Size in	Pipe O.D. in	Length Close in	Pipe Nipple Lengths															
			1 1/2	2	2 1/2	3	3 1/2	4	4 1/2	5	5 1/2	6	7	8	9	10	11	12
1/8	0.405	3/4																
1/4	0.540	7/8																
3/8	0.675	1																
1/2	0.840	1 1/8																
3/4	1.050	1 3/8																
1	1.315	1 1/2																
1 1/4	1.660	1 7/8																
1 1/2	1.900	1 3/4																
2	2.375	2																
2 1/2	2.875	2 1/2																
3	3.500	2 3/4																
4	4.500	2 3/4																
5	5.563	3																
6	6.625	3 1/4																

Note: Other lengths available.
 8" Pipe Size available as POA - contact your Anvil Representative for details.