




## Schedule 80 CPVC Technical Schedule 80 CPVC Fittings

### Female Adapter - Brass Transition

Socket x Fipt With Brass Thread Insert




| Part Number                | Size  | L       | M       | M1      | N     | Approx. Wt. (Lbs.) |
|----------------------------|-------|---------|---------|---------|-------|--------------------|
| <a href="#">835-005CBR</a> | 1/2   | 1-25/32 | 1- 5/32 | 1-3/16  | 11/32 | .12                |
| <a href="#">835-007CBR</a> | 3/4   | 2       | 1-13/32 | 1- 3/8  | 11/32 | .15                |
| <a href="#">835-010CBR</a> | 1     | 2- 7/32 | 1- 3/4  | 1-11/16 | 11/32 | .24                |
| <a href="#">835-012CBR</a> | 1-1/4 | 2- 3/8  | 2- 3/32 | 2- 1/16 | 3/8   | .34                |
| <a href="#">835-015CBR</a> | 1-1/2 | 2-17/32 | 2-13/32 | 2- 7/16 | 13/32 | .46                |
| <a href="#">835-020CBR</a> | 2     | 2-25/32 | 2- 7/8  | 3- 3/16 | 7/16  | 1.03               |

Not intended to convey or dispense water for human consumption through drinking or cooking

### Female Adapter - Brass Transition Reducing

Socket x Fipt With Brass Thread Insert




| Part Number                | Size    | L       | M       | M1      | N     | Approx. Wt. (Lbs.) |
|----------------------------|---------|---------|---------|---------|-------|--------------------|
| <a href="#">835-101CBR</a> | 3/4X1/2 | 2- 1/32 | 1- 7/16 | 1- 3/16 | 15/32 | .13                |

Not intended to convey or dispense water for human consumption through drinking or cooking

### Female Adapter - Stainless Steel Transition

Socket x Fipt With 316 Stainless steel Thread Insert  
NSF® Certified Lead Free

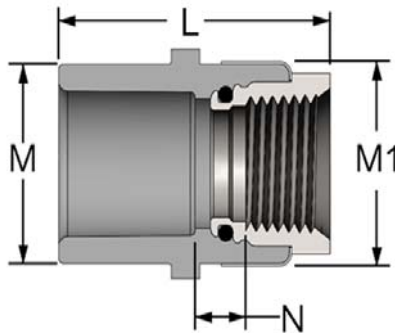

| Part Number                | Size  | L       | M       | M1      | N     | Approx. Wt. (Lbs.) |
|----------------------------|-------|---------|---------|---------|-------|--------------------|
| <a href="#">835-005CSS</a> | 1/2   | 1-25/32 | 1-5/32  | 1-3/16  | 11/32 | .10                |
| <a href="#">835-007CSS</a> | 3/4   | 2       | 1-3/8   | 1-13/32 | 1/4   | .14                |
| <a href="#">835-010CSS</a> | 1     | 2-1/4   | 1-23/32 | 1-11/16 | 15/32 | .24                |
| <a href="#">835-012CSS</a> | 1-1/4 | 2-3/8   | 2-3/32  | 2-1/16  | 3/8   | .28                |


Schedule 80 CPVC Technical  
**Schedule 80 CPVC Fittings**



**Female Adapter - Stainless Steel Transition**

(Continued)


Socket x Fipt With 316 Stainless steel Thread Insert  
NSF® Certified Lead Free

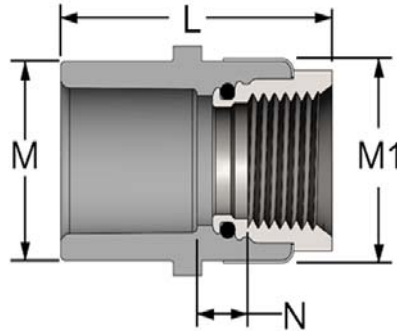

| Part Number                | Size  | L       | M     | M1     | N    | Approx. Wt. (Lbs.) |
|----------------------------|-------|---------|-------|--------|------|--------------------|
| <a href="#">835-015CSS</a> | 1-1/2 | 2-9/16  | 2-3/8 | 2-7/16 | 3/8  | .64                |
| <a href="#">835-020CSS</a> | 2     | 2-11/16 | 2-7/8 | 3      | 7/16 | .84                |

**Female Adapter - Special Reinforced**

Socket x SR Fipt - Stainless Steel Collar



| Part Number                | Size  | L       | M       | M1      | N    | Approx. Wt. (Lbs.) |
|----------------------------|-------|---------|---------|---------|------|--------------------|
| <a href="#">835-002CSR</a> | 1/4   | 1-13/32 | 27/32   | 27/32   | 3/32 | .03                |
| <a href="#">835-003CSR</a> | 3/8   | 1-15/32 | 15/16   | 31/32   | 3/32 | .03                |
| <a href="#">835-005CSR</a> | 1/2   | 1-23/32 | 1- 5/32 | 1- 3/16 | 3/32 | .06                |
| <a href="#">835-007CSR</a> | 3/4   | 1- 7/8  | 1-13/32 | 1- 3/8  | 3/32 | .08                |
| <a href="#">835-010CSR</a> | 1     | 2-5/32  | 1-23/32 | 1-11/16 | 3/32 | .12                |
| <a href="#">835-012CSR</a> | 1-1/4 | 2- 5/16 | 2- 3/32 | 2- 1/16 | 3/32 | .24                |
| <a href="#">835-015CSR</a> | 1-1/2 | 2- 7/16 | 2-13/32 | 2- 7/16 | 3/32 | .28                |
| <a href="#">835-020CSR</a> | 2     | 2-23/32 | 3       | 3- 1/32 | 1/4  | .45                |
| <a href="#">835-025CSR</a> | 2-1/2 | 3-9/32  | 3- 9/16 | 3- 9/16 | 3/16 | .70                |
| <a href="#">835-030CSR</a> | 3     | 3- 1/2  | 4- 1/4  | 4- 9/32 | 3/32 | 1.01               |
| <a href="#">835-040CSR</a> | 4     | 3-11/16 | 5- 7/32 | 5-7/32  | 1/4  | 1.35               |
| <a href="#">835-060CSR</a> | 6     | 4-31/32 | 7-21/32 | 7-21/32 | 1/4  | 3.16               |