



COUPLINGS

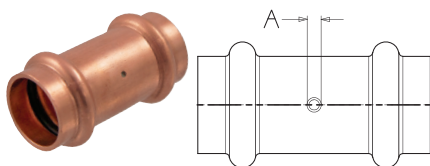


PC600-DS
Coupling P x P – Wrot

NOM. SIZE	APPROX. NET WT./LBS.	DIM. A INCHES
1/2*	.083	3/16
3/4*	.157	5/32
1*	.198	5/32
1 1/4*	.271	5/32
1 1/2*	.530	3/16
2*	.691	5/32
2 1/2	.669	1/8
3	.979	1/8
4	2.134	7/32

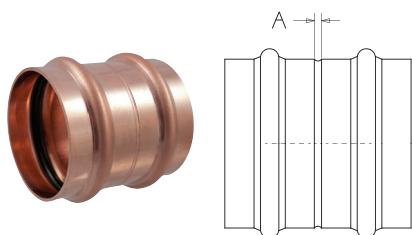


PC600-RS
Coupling P x P – Wrot

NOM. SIZE	APPROX. NET WT./LBS.	DIM. A INCHES
2 1/2	.688	1/8
3	.979	1/8
4	2.134	7/32

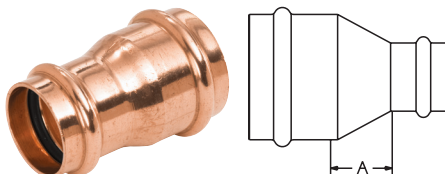

PC600-R
Reducing Coupling P x P – Wrot


NOM. SIZE	APPROX. NET WT./LBS.	DIM. A INCHES
3/4 x 1/2*	.121	1/4
1 x 1/2*	.139	7/16
1 x 3/4*	.184	13/32
1 1/4 x 3/4*	.245	1/2
1 1/4 x 1*	.231	7/16
1 1/2 x 3/4*	.382	15/32
1 1/2 x 1*	.370	13/32
1 1/2 x 1 1/4*	.399	9/32
2 x 3/4*	.516	29/32
2 x 1*	.552	11/16
2 x 1 1/4*	.570	11/16
2 x 1 1/2*	.662	7/16
2 1/2 x 1	.620	31/32
2 1/2 x 1 1/4	.644	1
2 1/2 x 1 1/2	.678	23/32
2 1/2 x 2	.699	11/32
3 x 1 1/2	.956	1 1/16
3 x 2	1.032	23/32
3 x 2 1/2	.951	1/2
4 x 2	1.949	1 5/32
4 x 2 1/2	1.807	1
4 x 3	1.960	27/32

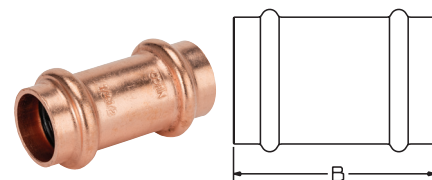

PC601 (No Stop)
Repair Coupling P x P – Wrot

NOM. SIZE	APPROX. NET WT./LBS.	DIM. B INCHES
1/2*	.082	1 3/4
3/4*	.157	2 1/4
1*	.190	2 1/4
1 1/4*	.271	2 15/32
1 1/2*	.511	3 11/32
2*	.691	3 5/8
2 1/2	.669	2 15/16
3	.979	3 5/16
4	1.878	4 5/16


COUPLINGS (Cont.)

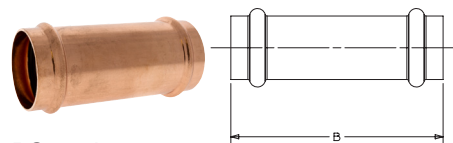

PC601L
Extended Repair Coupling P x P

NOM. SIZE	APPROX. NET WT./LBS.	DIM. B INCHES
1/2*	.1250	2 29/32
3/4*	.2200	3 9/32
1*	.3050	3 21/32
1 1/4*	.4090	4 1/16
1 1/2*	.7150	4 21/32
2*	1.0230	5 1/4

ELBOWS

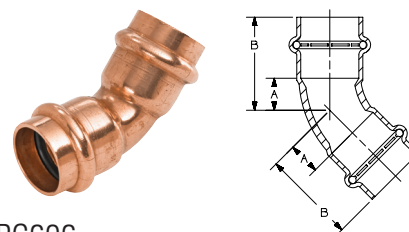

PC606
45° Elbow P x P – Wrot

NOM. SIZE	APPROX. NET WT./LBS.	DIM. A INCHES	DIM. B INCHES
1/2*	.092	13/32	1 1/8
3/4*	.181	1/2	1 13/32
1*	.251	5/8	1 1/2
1 1/4*	.403	25/32	1 25/32
1 1/2*	.666	15/16	2 5/16
2*	1.063	13/16	2 23/32
2 1/2	1.041	7/8	2 3/8
3	1.536	1 1/8	2 25/32
4	3.375	1 11/16	3 27/32

Visit our website for the most current information.

* IAPMO RECOGNIZED TO 300 PSI PER ASTM F3226