Carbon Coupling with Stop — P x P





Job Name	
Job Location	
P.O.#	
Engineer	
Contractor	
Wholesaler	
Merit Associate	

MeritPress™ - Carbon Coupling with Stop P x P is available in sizes ½" – 2" with an EPDM, HNBR and FKM sealing element.

- **FIRST TO MARKET Visual Indicator Press Ring (VIPR)™:** facilitates immediate identification of un-pressed connections.
- **Leak Before Press (LBP):** in addition to the Visual Indicator Press Ring (VIPR)™, all sizes have leak before press technology, which guarantees a visual indication if the fitting is not pressed.
- **Surface Protection:** Corrosion Resistant Zn-Ni Plating.
- **Grab Ring:** Deforms and Grips Outside Diameter of Pipe.
- **Applications:** Hydronic Heating, the Conveyance of Fluids, Gases, Oils, and Low-Pressure Steam.


MeritPress™ - Carbon Press Operational Parameters
Working pressure range from full vacuum to 250 psi (17.2 bar) for water, 125 psi (8.6 bar) for gas, and 200 psi (13.7 bar) for industrial applications.

MeritPress™ - Carbon Press Certifications
IAPMO Z 1117 (EPDM and FKM), IAPMO/ANSI LC 4/CSA 6.32 (HNBR), and UL 213 and FM 1920 (EPDM & FKM).

MeritPress™ - Carbon Press Codes and Standards
IAPMO Z 1117, IAPMO/ANSI LC 4/CSA 6.32, ASME B31.1, B31.3, B31.9, CSA B149.1, UPC, and UMC.

Carbon Coupling with Stop — P x P

Item Number			Nominal Size 1	A (in)	L (in)
EPDM	HNBR	FKM			
MB90000	MB90001	MB90002	½"	0.79	2.83
MB90005	MB90006	MB90007	¾"	0.87	3.23
MB90010	MB90011	MB90012	1"	0.87	3.58
MB90015	MB90016	MB90017	1¼"	1.13	4.72
MB90020	MB90021	MB90022	1½"	1.18	4.88
MB90025	MB90026	MB90027	2"	1.26	5.12

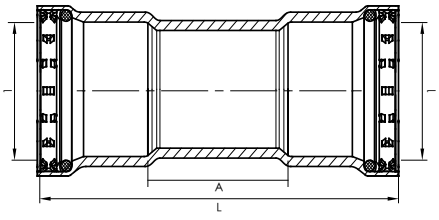

© 2025 Merit Brass Company / MeritPress™. All rights reserved.