


# DIMENSIONAL SPECIFICATIONS

STAINLESS STEEL ISO PATTERN FITTINGS 150 LB.


## 90 DEGREE ELBOW (304)

| Part #  | Size (IN.) | Approx. Net WT. (LB.) | A    | L    |
|---------|------------|-----------------------|------|------|
| K401-02 | 1/8        | 0.09                  | 0.67 | 0.75 |
| K401-04 | 1/4        | 0.13                  | 0.84 | 0.83 |
| K401-06 | 3/8        | 0.15                  | 0.93 | 0.98 |
| K401-08 | 1/2        | 0.22                  | 1.14 | 1.10 |
| K401-12 | 3/4        | 0.35                  | 1.42 | 1.30 |
| K401-16 | 1          | 0.55                  | 1.69 | 1.50 |
| K401-20 | 1-1/4      | 0.85                  | 2.05 | 1.77 |
| K401-24 | 1-1/2      | 1.10                  | 2.30 | 1.97 |
| K401-32 | 2          | 1.68                  | 2.81 | 2.28 |
| K401-40 | 2-1/2      | 2.93                  | 3.43 | 2.72 |
| K401-48 | 3          | 3.21                  | 3.92 | 3.07 |
| K401-64 | 4          | 6.28                  | 4.96 | 3.78 |

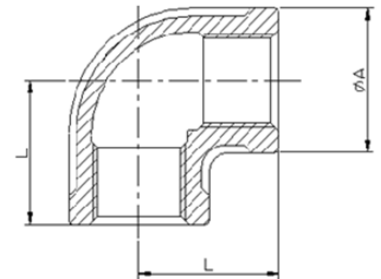

## 90 DEGREE ELBOW (316)

| Part #  | Size (IN.) | Approx. Net WT. (LB.) | A    | L    |
|---------|------------|-----------------------|------|------|
| K601-02 | 1/8        | 0.09                  | 0.67 | 0.75 |
| K601-04 | 1/4        | 0.13                  | 0.84 | 0.83 |
| K601-06 | 3/8        | 0.15                  | 0.93 | 0.98 |
| K601-08 | 1/2        | 0.22                  | 1.14 | 1.10 |
| K601-12 | 3/4        | 0.35                  | 1.42 | 1.30 |
| K601-16 | 1          | 0.55                  | 1.69 | 1.50 |
| K601-20 | 1-1/4      | 0.85                  | 2.05 | 1.77 |
| K601-24 | 1-1/2      | 1.10                  | 2.30 | 1.97 |
| K601-32 | 2          | 1.68                  | 2.81 | 2.28 |
| K601-40 | 2-1/2      | 2.93                  | 3.43 | 2.72 |
| K601-48 | 3          | 3.21                  | 3.92 | 3.07 |
| K601-64 | 4          | 6.28                  | 4.96 | 3.78 |

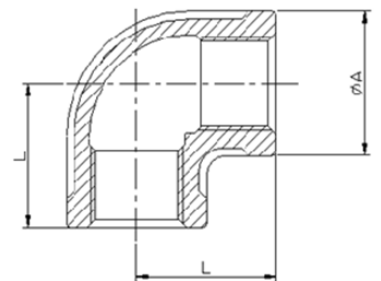

**MERIT**  
**BRASS**

DIRECTING THE FLOW OF *Quality*