


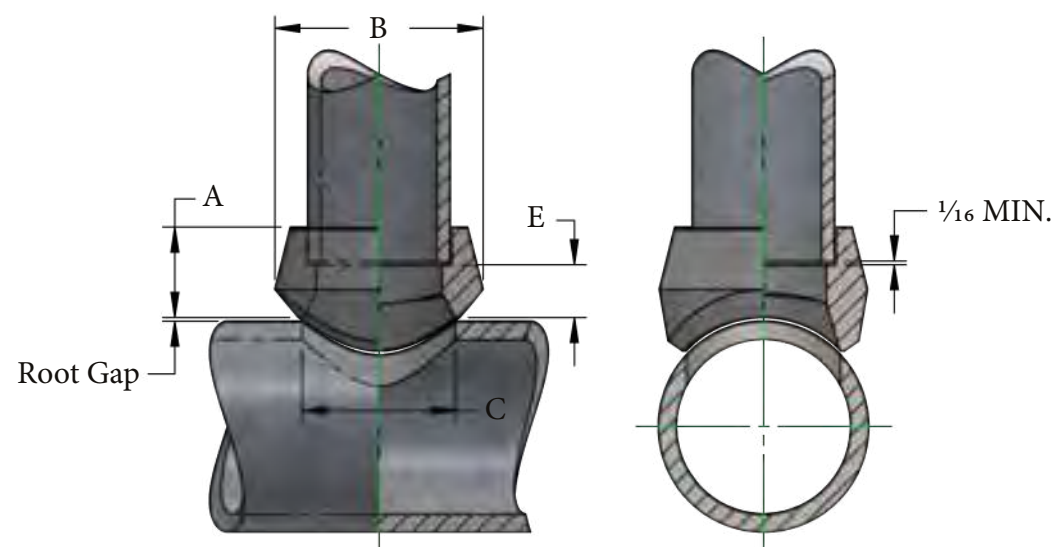


CLASS 3000						
Outlet Size	Dimensions			Weight		
	A	B	C	E		
NPS ⅜	¾	1	⅝	⅝ ₁₆	0.100	
NPS ¼	¾	1	⅝	⅝ ₁₆	0.100	
NPS ⅝	1⅜ ₁₆	1 ¼	¾	⅞ ₁₆	0.200	
NPS ½	1	1 ⅞ ₁₆	1⅝ ₁₆	⅞ ₁₆	0.300	
NPS ⅜	1 ⅜ ₁₆	1 ¾	1 ⅜ ₁₆	⅞ ₁₆	0.350	
NPS 1	1 ⅝ ₁₆	2 ⅞	1 ⅞ ₁₆	1⅜ ₁₆	0.600	
NPS 1 ¼	1 ⅝ ₁₆	2 ⅞ ₁₆	1 ¾	¾	0.850	
NPS 1 ½	1 ⅝	2 ⅝	2	¾	1.000	
NPS 2	1 ½	3 ½	2 ⅞ ₁₆	1⅜ ₁₆	1.600	
NPS 2 ½	1 1⅜ ₁₆	4 ⅜ ₁₆	3	¾	2.750	
NPS 3	2	4 1⅜ ₁₆	3 1⅜ ₁₆	1⅝ ₁₆	3.800	
NPS 3 ½	2 ⅞	5 ⅝	4	1	4.300	
NPS 4	2 ¾	6	4 ¾	1 ⅜ ₁₆	7.250	
NPS 5	2 ⅝	7	5 ⅞ ₁₆	1 ⅝	12.000	
NPS 6	2 ¾	8 ⅝	6 1⅜ ₁₆	1 ⅞ ₁₆	14.500	
CLASS 6000						
NPS ½	1 ¼	1 ¾	¾	⅞	0.500	
NPS ⅜	1 ⅞ ₁₆	2	1	⅞	0.800	
NPS 1	1 ⅞ ₁₆	2 ⅞ ₁₆	1 ⅝ ₁₆	1⅝ ₁₆	1.300	
NPS 1 ¼	1 ⅝	2 ¾	1 ½	1⅜ ₁₆	1.600	
NPS 1 ½	1 1⅜ ₁₆	3 ¼	1 1⅝ ₁₆	⅞	2.000	
NPS 2	2 ⅜ ₁₆	4 ⅜ ₁₆	2 ¾	1 ⅜ ₁₆	5.150	
CLASS 9000						
NPS ½	1 ¼	1 1⅜ ₁₆	¾	1⅜ ₁₆		
NPS ⅜	1 ⅞ ₁₆	1 1⅝ ₁₆	1⅝ ₁₆	⅞		
NPS 1	1 ⅞ ₁₆	2 ⅞ ₁₆	1 ⅝ ₁₆	1⅝ ₁₆		
NPS 1 ¼	1 ⅝	2 1⅜ ₁₆	1 ½	1⅜ ₁₆		
NPS 1 ½	1 1⅜ ₁₆	3 ¼	1 1⅝ ₁₆	1⅝ ₁₆		
NPS 2	2 ⅜ ₁₆	4 ⅜ ₁₆	2 ¾	1 ¼		

RUN SIZE CONSOLIDATIONS - CLASS 3000

Outlet Size

	1/8	1/4	3/8	1/2	3/4	1	1 1/4	1 1/2	2	2 1/2	3	3 1/2	4	5	6
RUN SIZES	3/8	3/8	1/2	1/2	3/4	1	1 1/4	1 1/2	2	2 1/2	3	3 1/2	4	5	6
	1/2	1/2	1 - 3/4	3/4	1	1 1/4	1 1/2	2	2 1/2	3	3 1/2	4	5	6	8
	1 - 3/4	1 - 3/4	2 1/2 - 1 1/4	1	1 1/2 - 1 1/4	1 1/2	2	2 1/2	3	3 1/2	4	5	6	8	10
	2 1/2 - 1 1/4	2 1/2 - 1 1/4	36 - 3	1 1/2 - 1 1/4	2 1/2 - 2	2	2 1/2	3	4 - 3 1/2	4	5	6	8	10	14 - 12
	36 - 3	36 - 3	FLAT	2 1/2 - 2	5 - 3	2 1/2	3 1/2 - 3	4 - 3 1/2	5	5	6	8	10	12	16
	FLAT	FLAT		8 - 3	12 - 6	3 1/2 - 3	5 - 4	6 - 5	6	6	8	10	14 - 12	14	18
				36 - 10	36 - 14	5 - 4	8 - 6	12 - 8	10 - 8	8	10	14 - 12	20 - 16	18 - 16	22 - 20
				FLAT	FLAT	10 - 6	18 - 10	24 - 14	18 - 12	12 - 10	14 - 12	20 - 16	22	22 - 20	28 - 24
						36 - 12	36 - 20	36 - 26	36 - 20	18 - 14	20 - 16	36 - 24	36 - 24	28 - 24	36 - 30
						FLAT	FLAT	FLAT	FLAT	36 - 20	36 - 24	FLAT	FLAT	36 - 30	FLAT

► A FLAT Sockolet can be used for connections to pipe larger than NPS 36, welding caps, elliptical heads and flat surfaces.

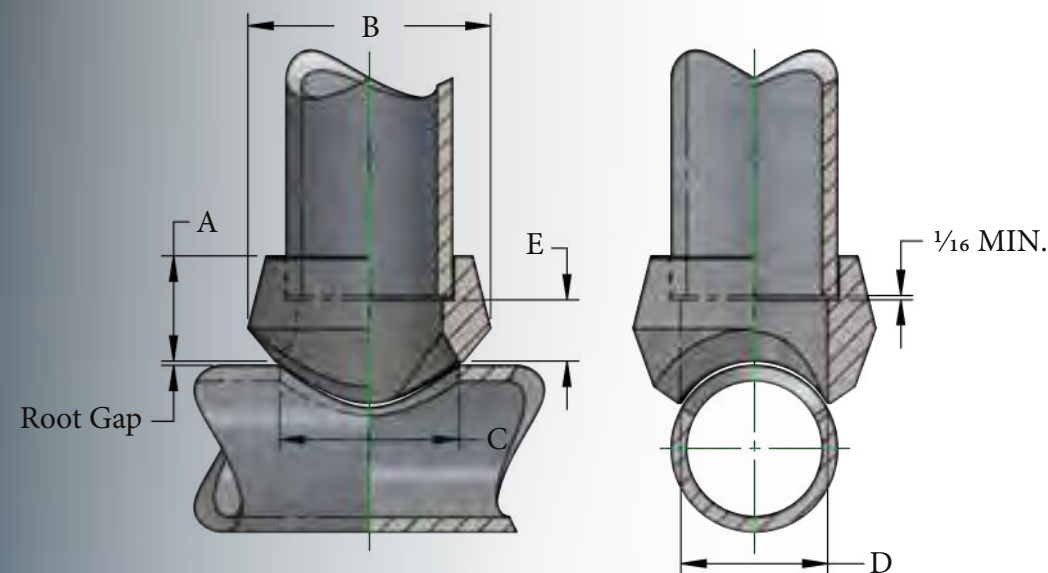

Outlet Size	Dimensions					Weight
	A	B	C	D	E	
NPS ½	1	1 ¾	1 5/16	0.622	¾	0.150
NPS ¾	1 1/16	1 ¾	1 ¾	0.824	½	0.250
NPS 1	1 5/16	2 ¾	1 7/16	1.049	¾	0.450
NPS 1 ¼	1 5/16	2 7/16	1 ¾	1.380	¾	0.650
NPS 1 ½	1 ¾	2 ¾	2	1.610	1 1/16	0.850
NPS 2	1 ½	3 ½	2 9/16	2.067	1 5/16	1.400
NPS 2 ½	1 9/16	4 1/16	3	2.469	¾	2.250
NPS 3	1 ¾	4 13/16	3 11/16	3.068	1 5/16	3.750
NPS 3 ½	1 11/16	5 ¾	4 7/16	3.548	1 1/16	4.300
NPS 4	1 ¾	6 1/16	4 ¾	4.026	1 1/16	6.600
NPS 5	2 7/16	7 ¼	5 ¼	5.047	1	9.000
NPS 6	2 11/16	8 11/16	6 1/16	6.065	1 ¾	15.500

RUN SIZE CONSOLIDATIONS - CLASS 6000

Outlet Size

	$\frac{1}{2}$	$\frac{3}{4}$	1	1 $\frac{1}{4}$	1 $\frac{1}{2}$	2
RUN SIZES	1 - $\frac{3}{4}$	1	1 $\frac{1}{2}$ - 1 $\frac{1}{4}$	1 $\frac{1}{2}$	2	2 $\frac{1}{2}$
	2 - 1 $\frac{1}{4}$	2 $\frac{1}{2}$ - 1 $\frac{1}{4}$	2 $\frac{1}{2}$ - 2	2 $\frac{1}{2}$ - 2	2 $\frac{1}{2}$	3
	6 - 2 $\frac{1}{2}$	10 - 3	10 - 3	3 $\frac{1}{2}$ - 3	3 $\frac{1}{2}$ - 3	4
	36 - 8	36 - 12	36 - 12	8 - 4	5 - 4	5
	FLAT	FLAT	FLAT	36 - 10	8 - 6	6
				FLAT	18 - 10	10 - 8
					36 - 20	20 - 12
					FLAT	36 - 24
						FLAT

RUN SIZE CONSOLIDATIONS - CLASS 9000

Outlet Size

		$\frac{1}{2}$	$\frac{3}{4}$	1	1 $\frac{1}{4}$	1 $\frac{1}{2}$	2
RUN SIZES	1 - $\frac{3}{4}$	1	1 $\frac{1}{2}$ - 1 $\frac{1}{4}$	1 $\frac{1}{2}$	2	2 $\frac{1}{2}$	2 $\frac{1}{2}$
	2 - 1 $\frac{1}{4}$	2 $\frac{1}{2}$ - 1 $\frac{1}{4}$	2 $\frac{1}{2}$ - 2	2 $\frac{1}{2}$ - 2	2 $\frac{1}{2}$	4 - 3	4 - 3
	6 - 2 $\frac{1}{2}$	10 - 3	10 - 3	3 $\frac{1}{2}$ - 3	3 $\frac{1}{2}$ - 3	6 - 5	6 - 5
	36 - 8	36 - 12	36 - 12	8 - 4	5 - 4	14 - 8	14 - 8
	FLAT	FLAT	FLAT	36 - 10	10 - 6	36 - 16	36 - 16
				FLAT	36 - 12	FLAT	FLAT