


API Casing Swage Nipples

API 5B, API 5CT, API 5L, K55 and N80

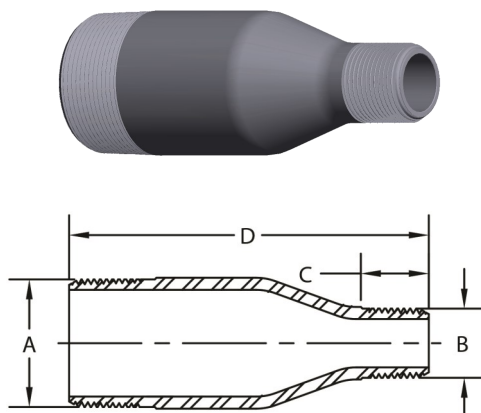

Pipe Size	A	B	C	D	Wt Ea.
4-1/2 OD 8RD 11.6 lb/ft x 2 NUE 10RD XH	4.500	2.375	2.125	9.00	12.00
4-1/2 OD 8RD 10.5 lb/ft X 2-1/2 EUE 8RD STD		3.094	2.625	11.00	8.00
4-1/2 OD 8RD 11.6 lb/ft X 2-1/2 EUE 8RD XH					12.00
4-1/2 OD 8RD 11.6 lb/ft X 3 NUE 10RD XH		3.500	2.750	9.00	7.50
5-1/2 OD 8RD 14.0 lb/ft X 2 LP 11.5V STD	5.500	2.375	1.625	11.00	12.50
5-1/2 OD 8RD 20.0 lb/ft X 2 LP 11.5V XH					17.00
5-1/2 OD 8RD 14.0 lb/ft X 2-1/2 EUE 8RD STD		3.094	2.625		12.50
5-1/2 OD 8RD 14.0 lb/ft X 3 LP 8V STD		3.500	2.000		12.50
7 OD 8RD 23.0 lb/ft X 2 LP 11.5V STD	7.000	2.375	1.562	12.00	16.10
7 OD 8RD 38.0 lb/ft X 2 LP 11.5V XH					25.00
7 OD 8RD 23.0 lb/ft X 4-1/2 OD 8RD STD		4.500	3.000		17.00
8-5/8 OD 8RD 32.0 lb/ftX 2 LP 11.5V STD	8.625	2.375	1.562	13.00	-
8-5/8 OD 8RD 32.0 lb/ft X 4-1/2 OD 8RD STD		4.500	3.125		-
8-5/8 OD 8RD 24.0 lb/ft X 7 OD 8RD STD		7.000	3.625		-